



Bulletin 100-C/104-C — IEC Contactors

- Compact sizes from 4...55 kW/5...75 Hp (9...97 A)
- AC and DC coil control
- Common accessories for all contactor sizes
- Front and side mounting of auxiliary contacts
- Electronic and pneumatic timing modules
- Space-saving coil-mounted control modules
- Reversible coil terminations (line or load side)
- All devices can be attached to 35 mm DIN mounting Rail
- Environmentally friendly materials

The Bulletin 100-C/104-C IEC contactor family, along with a wide range of common accessories and Bulletin 193 solid-state overload relays, provides the most compact and flexible starter component system available.

Your order must include: cat. no. of the contactor specified with coil voltage code and, if required, cat. no. of any accessories and/or replacement coils.

Table of Contents

Product Selection..... this page
 Accessories..... 2-142
 Approximate Dimensions..... 2-194

Standards Compliance

EN/IEC 60947-4-1, 60947-5-1
 IEC 60947 Type “2”
 Coordination
 CSA C22.2 No. 14
 UL 508
 Meets the material restrictions for European Directive 2002/95/IEC-EU-RoHS

Certifications

CE Marked
 cULus Listed (File No. E3125;
 Guide NLDX, NLDX7)
 CCC

Product Selection

3-Pole AC- and DC-Operated Contactors

I _e [A]		Ratings for Switching AC Motors — AC-2, AC-3, AC-4										Aux. Contacts		Cat. No.	
		3-Phase kW (50 Hz)				Hp (60 Hz)						N.O.	N.C.		
AC-3	AC-1	230V	400V/415V	500V	690V	1-Phase		3-Phase							
						115V	230V	200V	230V	460V	575V				
9	32	3	4	4	4	1/2	1-1/2	2	2	5	7-1/2	1	0	‡	100-C09⊗10
												0	1	‡	100-C09⊗01
12	32	4	5.5	5.5	5.5	1/2	2	3	3	7-1/2	10	1	0	‡	100-C12⊗10
												0	1	‡	100-C12⊗01
16	32	5.5	7.5	7.5	7.5	1	3	5	5	10	15	1	0	‡	100-C16⊗10
												0	1	‡	100-C16⊗01
23	32	7.5	11	13	10	2	3	5	7-1/2	15	15	1	0	‡	100-C23⊗10
												0	1	‡	100-C23⊗01
30	65	10	15	15	15	2	5	7-1/2	10	20	25	0	0		100-C30⊗00
												1	0		100-C30⊗10
37	65	11	18.5/20	20	18.5	3	5	10	10	25	30	0	1		100-C30⊗01
												1	0		100-C37⊗10
43	85	13	22	25	22	3	7-1/2	10	15	30	30	0	0		100-C37⊗01
												1	0		100-C43⊗00
60	100	18.5	32	37	32	5	10	15	20	40	50	1	0		100-C43⊗10
												0	1		100-C43⊗01
72	100	22	40	45	40	5	15	20	25	50	60	0	0		100-C60⊗00
												1	0		100-C60⊗10
85	100	25	45	55	45	7-1/2	15	25	30	60	60	0	1		100-C60⊗01
												1	0		100-C72⊗00
97	130	30	55	55	55	10	15	30	30	75	75	0	0		100-C72⊗10
												0	1		100-C72⊗01
97	130	30	55	55	55	10	15	30	30	75	75	0	0		100-C85⊗00
												1	0		100-C85⊗10
97	130	30	55	55	55	10	15	30	30	75	75	0	1		100-C85⊗01
												1	0		100-C97⊗00
97	130	30	55	55	55	10	15	30	30	75	75	1	0		100-C97⊗10
												0	1		100-C97⊗01


‡ For screwless terminals, add an "R" after the letter "C" in the catalog number. Example: **Cat. No. 100-C09⊗10** becomes **Cat. No. 100-CR09⊗10**.

⊗ Coil voltage code and terminal position—see page 2-131

Bulletin 100-C/104-C
IEC Contactors
 Approximate Dimensions

Dimensions are shown in millimeters (inches). Dimensions are not intended for manufacturing purposes.

Bulletin 100-C Contactors and Accessories

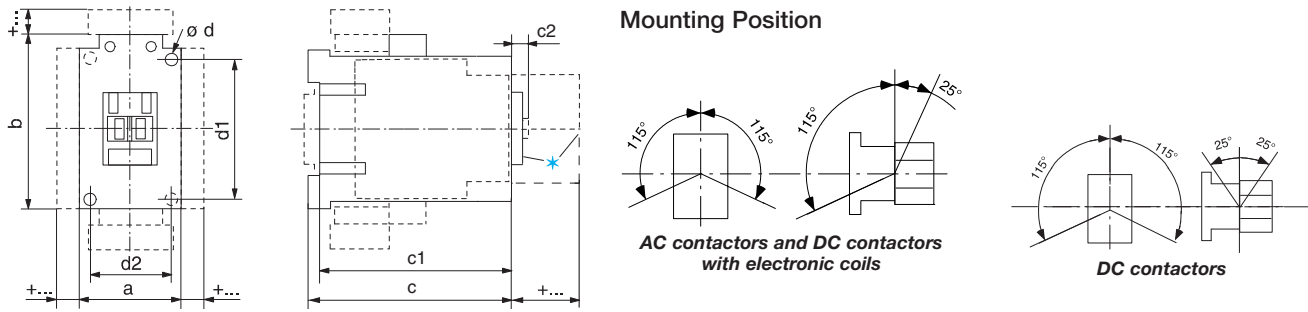

2

AC Contactors and DC Contactors with 12V or 24V Electronic Coils

Cat. No.	a	b	c	c1	c2	Ød	d1	d2
100-C09...100-C23	45 (1-25/32)	81 (3-3/16)	80.5 (3-11/64)	75.5 (2-31/32)	6 (15/64)	2 - 4.5 (2 -3/16)	60 (2-23/64)	35 (1-3/8)
100-C30, 100-C37	45 (1-25/32)	81 (3-3/16)	97.5 (4)	92.5 (3-41/64)	6.5 (1/4)	2 - 4.5 (2 -3/16)	60 (2-23/64)	35 (1-3/8)
100-C40	59 (2-21/64)	81 (3-3/16)	100.5 (3-61/64)	95.5 (3-49/64)	6.5 (1/4)	2 - 4.5 (2 -3/16)	60 (2-23/64)	45 (1-25/32)
100-C43	54 (2-1/8)	81 (3-3/16)	100.5 (3-61/64)	95.5 (3-49/64)	6.5 (1/4)	2 - 4.5 (2 -3/16)	60 (2-23/64)	45 (1-25/32)
100-C60...100-C97	72 (2-53/64)	122 (4-51/64)	117 (4-39/64)	111.5 (4-25/64)	8.5 (21/64)	4 - 5.4 (4 - 7/32)	100 (3-15/16)	55 (2-11/64)
100-C90	95 (3-47/64)	122 (4-51/64)	117 (4-39/64)	111.5 (4-25/64)	8.5 (21/64)	4 - 5.4 (4 - 7/32)	100 (3-15/16)	55 (2-11/64)

DC Contactors with Conventional Coils

Cat. No.	a	b	c	c1	c2	Ød	d1	d2
100-C09Z...100-C16Z	45 (1-25/32)	81 (3-3/16)	106.5 (4-3/16)	101.5 (4)	6 (15/64)	2 - 4.5 (2 -3/16)	60 (2-23/64)	35 (1-3/8)
100-C23Z	45 (1-25/32)	81 (3-3/16)	123.5 (4-55/64)	119 (4-43/64)	6 (15/64)	2 - 4.5 (2 -3/16)	60 (2-23/64)	35 (1-3/8)
100-C30Z...100-C37Z	45 (1-25/32)	81 (3-3/16)	141.5 (5-37/64)	136.5 (5-3/8)	6.5 (1/4)	2 - 4.5 (2 -3/16)	60 (2-23/64)	35 (1-3/8)
100-C40Z	59 (2-21/64)	81 (3-3/16)	144.5 (5-11/16)	139.5 (5-1/2)	6.5 (1/4)	2 - 4.5 (2 -3/16)	60 (2-23/64)	45 (1-25/32)
100-C43Z	54 (2-1/8)	81 (3-3/16)	144.5 (5-11/16)	139.5 (5-1/2)	6.5 (1/4)	2 - 4.5 (2 -3/16)	60 (2-23/64)	45 (1-25/32)
100-C60D...100-C97D	72 (2-53/64)	122 (4-51/64)	117 (4-39/64)	111.5 (4-25/64)	8.5 (21/64)	4 - 5.4 (4 - 7/32)	100 (3-15/16)	55 (2-11/64)
100-C90D	95 (3-47/64)	81 (3-3/16)	117 (4-39/64)	111.5 (4-25/64)	8.5 (21/64)	4 - 5.4 (4 - 7/32)	100 (3-15/16)	55 (2-11/64)

DC Contactors with 110V or 220V DC Electronic Coils

Cat. No.	a	b	c	c1	c2	Ød	d1	d2
100-C09E...100-C23E	45 (1-25/32)	105 (4-1/8)	80.5 (3-11/64)	75.5 (2-31/32)	6 (15/64)	2 - 4.5 (2 -3/16)	60 (2-23/64)	35 (1-3/8)
100-C30E...100-C37E	45 (1-25/32)	105 (4-1/8)	97.5 (4)	92.5 (3-41/64)	6.5 (1/4)	2 - 4.5 (2 -3/16)	60 (2-23/64)	35 (1-3/8)
100-C40EA...100-C40ED	59 (2-21/64)	105 (4-1/8)	100.5 (3-61/64)	95.5 (3-49/64)	6.5 (1/4)	2 - 4.5 (2 -3/16)	60 (2-23/64)	45 (1-25/32)
100-C43EA...100-C43ED	54 (2-1/8)	105 (4-1/8)	100.5 (3-61/64)	95.5 (3-49/64)	6.5 (1/4)	2 - 4.5 (2 -3/16)	60 (2-23/64)	45 (1-25/32)

Accessories

	Contactors with	mm	(inches)
Auxiliary contact block for front mounting	2- or 4-pole	c/c1 + 39	(c/c1 + 1-37/64)
Auxiliary contact block for side mounting	1- or 2-pole	a + 9	(a + 23/64)
Pneumatic Timing Module		c/c1 + 58	(c/c1 + 2-23/64)
Electronic Timing Module	on coil terminal side	b + 24	(b + 15/16)
Mechanical Interlock	on side of contactor	a + 9	(a + 23/64)
Mechanical Latch		c/c1 + 61	(c/c1 + 2-31/64)
Interface Module	on coil terminal side	b + 9	(b + 23/64)
Surge Suppressor	on coil terminal side	b + 3	(b + 1/8)
Labeling with *	label sheet	+ 0	(+ 0)
	marking tag sheet with clear cover	+ 0	(+ 0)
	marking tag adapter for System V4 / V5	+ 5.5	(+ 7/32)
	marking tag adapter for System Bul. 1492W	+ 5.5	(+ 7/32)
Terminal Lug Kit	100-C09...C23	b + 53	(b + 2-3/32)
	100-C30...37	b + 44	(b + 1-47/64)
	100-C43	b + 52	(b + 2-3/64)
	100-C60...C97	b + 99	(b + 3-7/8)
Paralleling Links	100-C09...C23	b + 78	(b + 3-1/16)
	100-C30...C37	c + 9/5	(c + 3/8)
		b + 85	(b + 3-11/32)