


## 电气特性 ELECTRICAL CHARACTERISTICS

额定 RATING		熔断时间 BLOWING TIME
2.1In	Max(最慢)	30min
2.75In	Min(最快)	10sec
	Max(最慢)	3sec
4In	Min(最快)	3ms
	Max(最慢)	300ms
10In	Max(最慢)	20ms

## I-T CHARACTERISTICS CURVE

电流-时间曲线图

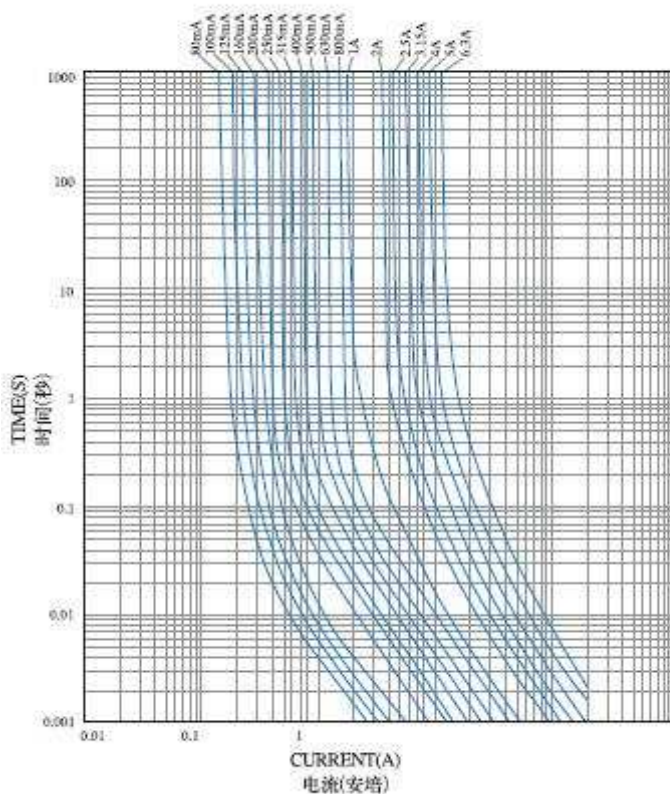

## 产品目录 Product Model

## 额定电流 Rating Current

## 额定电压(V) Rating Voltage

ZH102-0063	63mA	250
ZH102-0080	80mA	250
ZH102-0100	100mA	250
ZH102-0125	125mA	250
ZH102-0160	160mA	250
ZH102-0200	200mA	250
ZH102-0250	250mA	250
ZH102-0315	315mA	250
ZH102-0400	400mA	250
ZH102-0500	500mA	250
ZH102-0630	630mA	250
ZH102-0800	800mA	250
ZH102-010	1A	250
ZH102-013	1.25A	250
ZH102-016	1.6A	250
ZH102-020	2A	250
ZH102-025	2.5A	250
ZH102-030	3A	250
ZH102-032	3.15A	250
ZH102-040	4A	250
ZH102-050	5A	250
ZH102-063	6.3A	250