

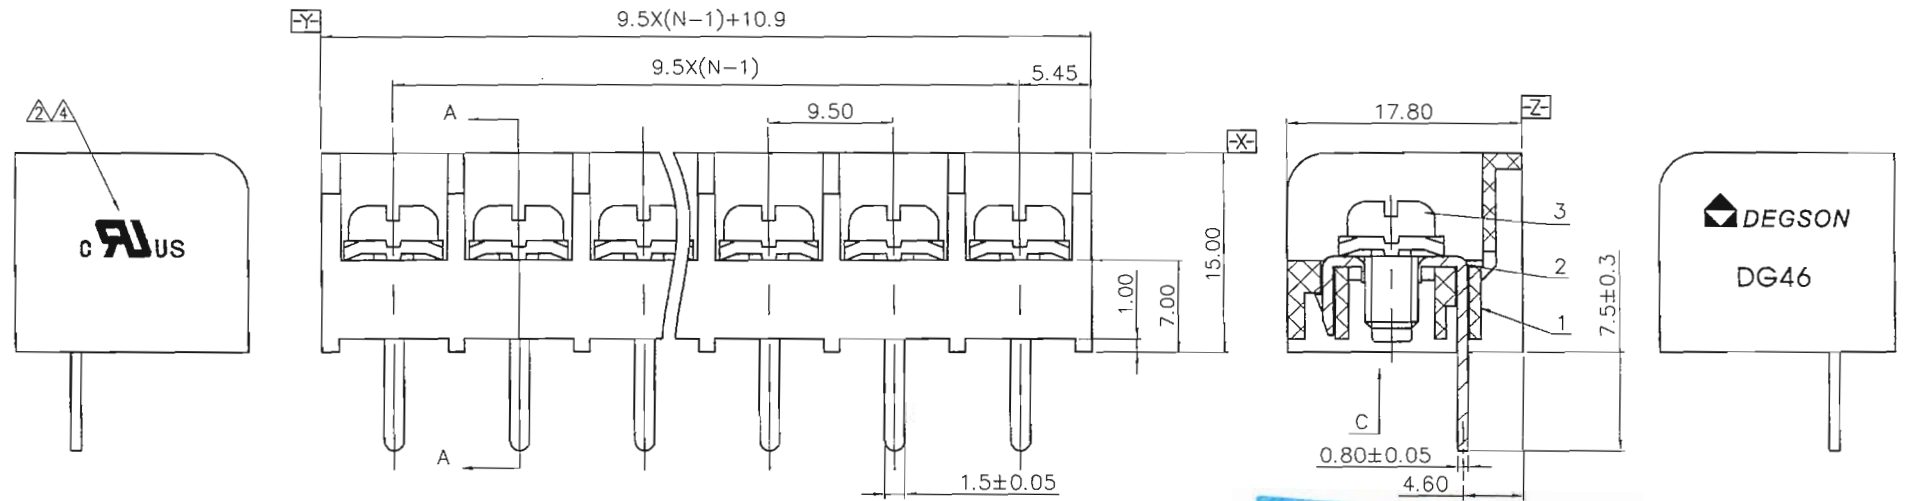


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
△		产品名称由DG46A变更为DG46S	WF	02/21/06"
△		增加UL刻字	CSX	09/30/06"
△		增加RO.9半圆柱特征	Mickey	06/05/09"
△	14-0519	修改电流参数和刻字	Yu jin	01/21/15"

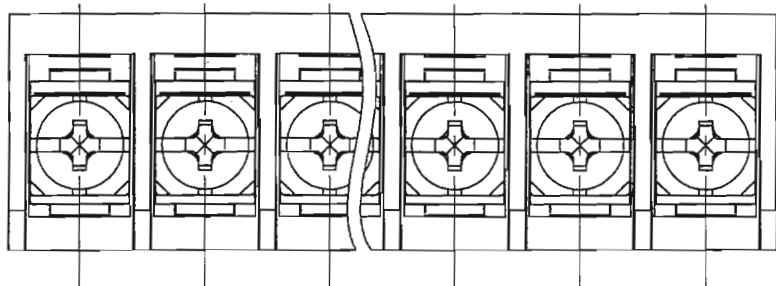

- NOTES:
- 1.DIMENSION SHALL BE INTERPRETED PER ASME Y14.5-2009.
 - 2.PITCH: 9.5MM ,POLES:N=2-26P
 - 3.RATED VOLTAGE/CURRENT: UL 300V/30A △
IEC 450V/32A
 - 4.OPERATION TEMPERATURES: -40℃~+105℃
 - 5.WITHSTANDING VOLTAGE: AC2500V/1MIN
 - 6.INSULATION RESISTANCE: 500M Ω/DC500V
 - 7.WIRE RANGE: 22~12AWG,4MM²
 - 8.MAX.TORQUE VALUE: M4,12.24kgf.cm
 - 9.UNDIMENSIONED TOLERANCES:



文管中心
研发专用
2015.03.27

PITCH RANGE IN MM	NOMINAL DIMENSION RANGE IN MM							—
	OVER 6 TO 10	OVER 10 TO 24	OVER 30 TO 60	OVER 60 TO 100	OVER 100 TO 150	OVER 150	OVER 150	
±0.10	±0.15	±0.25	±0.20	±0.30	±0.50	±0.70	±1.00	0.05/10

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
3	M4*8(7.5*7.5)bright screws	S000000570(H)	XX	Steel	Ni plated
2	DG46S Pin header	5012B00030(H)	XX	Brass	Sn plated
1	DG46S-B Housing	5012AYYXXA(H)	1	PA66	UL94V-0

DEGSON 宁波高正电子有限公司
DEGSON® DEGSON ELECTRONICS CO., LTD

NAME: DG46S-B-XXP-1Y-00A(H)

APPD: Alan 02/04/15
CHKD: penny 01/21/15
DRFT: home 01/05/06"

TITLE: ASSEMBLY DRAWING
DRAWING NO.: DG46S-E14

DO NOT SCALE DRAWING

SCALE	N/A	SHEET	1/1
-------	-----	-------	-----

H
G
F
E
D
C
B
A

H
G
F
E
D
C
B
A