
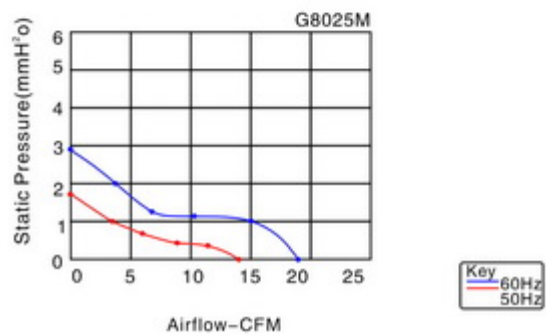


尺寸 Size:80mmx80mmx25mm
 风量 Airflow:24~39m3/hr
 14~23CFM
 重量 Weight:208g
 噪音 Noise:22~30dBA
 风叶 Impeller:PBT Thermoplastic Black,UL94-VO
 外框 Frame:Aluminum Alloy
 端子 Terminals:0.5mm
 引线 Lead Wire:AWG#22 UL 1007(Optional)
 马达 Motor:Shaded Pole Induction Motor
 安规认证 Safety:UL > CUL > TUV > CE >
 温度范围 Operation Temperature:-10°C~+65°C

Model (型号)	Bearing System (轴承型式)	Voltage VAC (电压)	Freq. Hz (频率)	Current A (电流)	Power W (功率)	Speed RPM (转速)	Noise dBA (噪音)	Air Flow (风量)		Phase (相数)	Capacitor (电容)
								M3/hr	CFM		
G8025HA,S	Sleeve	100~125	50/60	0.13	13	2300/2700	27/30	32/39	19/23	1	/
G8025HA,S		200~240	50/60	0.07	13	2300/2700	27/30	32/39	19/23	1	/
G8025HA,B	Ball	100~125	50/60	0.13	13	2300/2700	27/30	32/39	19/23	1	/
G8025HA,B		200~240	50/60	0.07	13	2300/2700	27/30	32/39	19/23	1	/
G8025MA,S	Sleeve	100~125	50/60	0.13	13	1700/2200	22/26	24/32	14/19	1	/
G8025MA,S		200~240	50/60	0.07	13	1700/2200	22/26	24/32	14/19	1	/
G8025MA,B	Ball	100~125	50/60	0.13	13	1700/2200	22/26	24/32	14/19	1	/
G8025MA,B		200~240	50/60	0.07	13	1700/2200	22/26	24/32	14/19	1	/

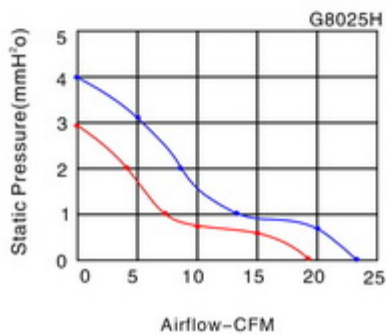

Key
 60Hz
 50Hz