
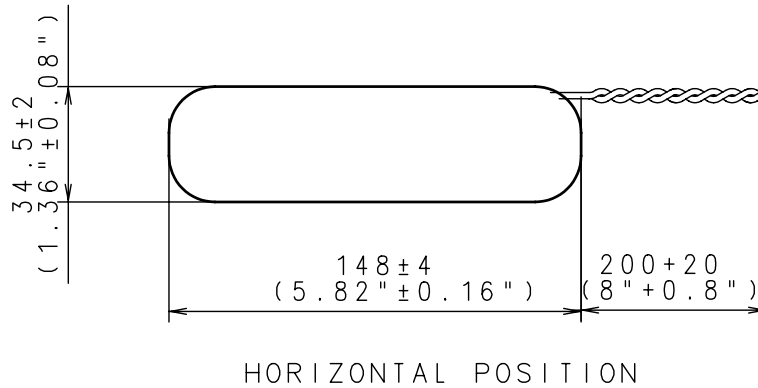



WARNING!
ALL THE INFORMATION CONTAINED IN THIS DOCUMENT OR DISCLOSED BY IT IS THE PROPERTY OF TADIRAN BATTERIES LTD. AND MAY NOT BE USED WITHOUT ITS WRITTEN AUTHORIZATION.

REV	DESCRIPTION	CHNGD SHEET	E.C.N	DATE	DRAWN	CHECKED
E	CELLS TYPE CHANGED		-	06/03/07	KATYA	DANIEL

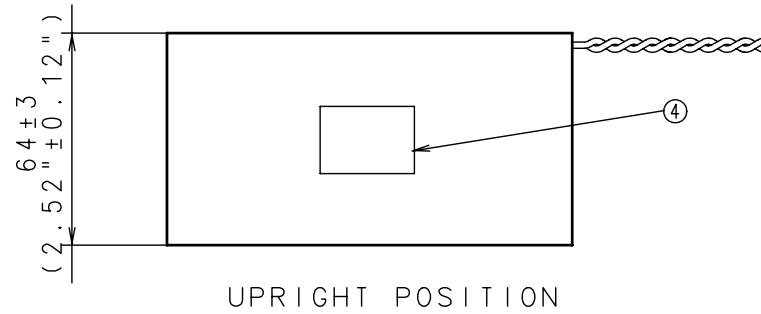

NOTES

- LABEL LETTERING SHALL INCLUDE : WARNING, BATTERY TITLE, NOMINAL VOLTAGE & BATCH NO.
- BATTERY SHOULD BE MOUNTED IN THE APPLICATION IN UPRIGHT OR HORIZONTAL POSITION.

TECHNICAL DATA @25 °C

- | | |
|---|------------------|
| 1. O.C.V. : | 7.26V ± 7.44V |
| 2. C.C.V. (@0.5A @0.1 SEC) : | 7.08V ± 7.30V |
| 3. CAPACITY TO 6V (@0.5 A @2% DUTY CYCLE) : | 38Ah |
| 4. MAXIMUM 1 SEC. PULSE TO 6V : | 3A |
| 5. MAXIMUM PULSE LENGTH (@0.5 A TO 5.6V) : | 1000 SEC |
| 6. OPERATING TEMPERATURE : | -40 °C TO +85 °C |
| 7. WEIGHT MAX. : | 460GR. |

8	61000033003	P.T.C.	SRP 200	PC	1	
7	61000023014	EXTERNAL SLEEVE	SHRINKABLE PVC	MM	160	
6	61000031012	WIRE, BLACK	18AWG (19x30AWG)	MM	310	UL-1007
5	61000031011	WIRE, RED	PVC JACKET	MM	250	
4	61000029002	LABEL		PC	1	
3	61000035002	DIODE	SB 540	PC	2	
2	61155111020	HLC-1550A	3.6V	PC	2	
1	15493021101	TL-4930	SIZE : D	PC	4	

NO.	PART NO.	NAME	DESCRIPTION	U/M	QTY	NOTES
UNLESS OTHERWISE SPECIFIED:			PROCESSING LEVEL			
ALL DIMENSIONS ARE IN MM.			OPERATION			
TOLERANCES: LINEAR : ANGLES : .			CATALOG NO.			
ROUGHNESS:						
SCALE: N.S.						
TADIRAN BATTERIES			DRAWN HAZOUT 31/10/01 SHEET/OF DESIGNED HAZOUT 31/10/01 1/1 CHECKED A.DANIEL 31/10/01 APPROVED G.COTEN 31/10/01			
PROD/PROJ: -			61931212501			