

DC COMPONENTS CO., LTD.

RECTIFIER SPECIALISTS

SM4001 THRU SM4007

TECHNICAL SPECIFICATIONS OF SURFACE MOUNT SILICON RECTIFIER

VOLTAGE RANGE - 50 to 1000 Volts

CURRENT - 1.0 Ampere

FEATURES

- * Ideal for surface mounted applications
- * Low leakage current
- * Glass passivated junction

MECHANICAL DATA

* Case: Molded plastic

* Epoxy: UL 94V-0 rate flame retardant *Terminals: Solder plated solderable per

MIL-STD-202E, Method 208 guaranteed

* Polarity: Color band denotes cathode end


* Mounting position: Any

* Weight: 0.12 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 $^{\circ}$ C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

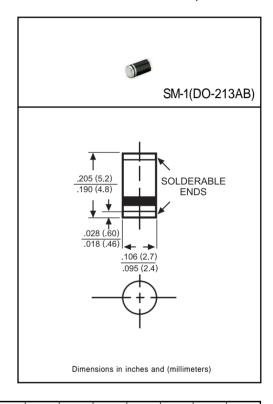



		SYMBOL	SM4001	SM4002	SM4003	SM4004	SM4005	SM4006	SM4007	UNITS
Maximum Recurrent Peak Reverse Voltage		VRRM	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage		VRMS	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage		VDC	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current TA = 75°C		lo	1.0							Amps
Peak Forward Surge Current IFM(surge): 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)		IFSM	30						Amps	
Maximum Forward Voltage at 1.0A DC		VF	1.1						Volts	
Maximum DC Reverse Current at	@TA = 25°C	JR 5.0							uAmps	
Rated DC Blocking Voltage	@TA = 125°C	"	50							
Maximum Thermal Resistance (Note 2)		RθJL	20							°C/W
Typical Junction Capacitance (Note 1)		Cı	15							pF
Operating and Storage Temperature Range		TJ, TSTG	-65 to + 175							۰C


NOTES: 1. Measured at 1.0 MHz and applied reverse voltage of 4.0VDC


 $2. \ Thermal\ resistance\ (Junction\ to\ Ambient), 24 in^2\ (6.0 mm^2)\ coppeer\ pads\ to\ each\ terminal.$


RATING AND CHARACTERISTIC CURVES (SM4001 THRU SM4007)













DC COMPONENTS CO., LTD.

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.